



Universal Module V3



www.danalock.com


Danalock International ApS – Gammel Stillingvej 427C, 8462 Harlev, DK, +45 4242 8122, info@danalock.com

Specifications

Operating voltage range	12 – 24 V DC
Max input (at 24 V)	100 mA
Number of relays	2
Type of relays	Potential-free contacts (NO/NC)
Power output	+ 4 dBm
Max relay voltage	48 V
Wireless communication	Bluetooth® 4.2 Low Energy
Bluetooth® range	5 – 10 meters

Wiring

Set up your Universal module according to this schematic. Use relay 1 before relay 2 if possible.

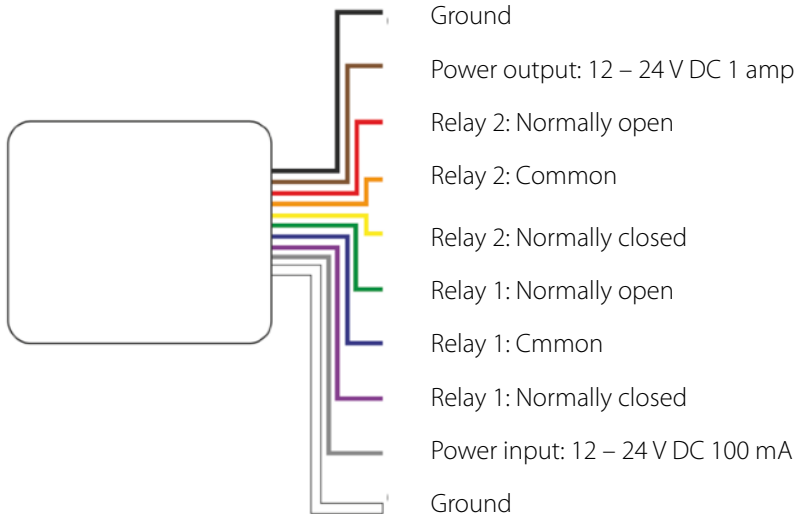

Click commands

You can configure the Universal Module via the button found in the small hole on the module. When you get to the setting you want, wait for 5 seconds and the Universal Module will react. If you make a wrong number of clicks, just stop at an unmarked number of clicks and wait for 5 seconds. The LED will flash red.

Clicks	Color	Activity
1	Green	Inclusion mode
This command is for setting up the Universal Module with a smart home gateway such as Z-Wave or ZigBee (not Homekit). The Universal Module will respond by blinking green. Now the module is in ex/inclusion mode and you have 30 seconds to pair or unpair it with a gateway.		
10	Red	Reset the Danalock

LED signals

LED mode	LED color	Status indication
3 sec constant white		Power on
Constant purple		Firmware update activated
Blinking blue light		Settings changed
5 sec blinking white light		Identify
5 sec constant red		Factory reset
5 sec constant green followed by green blinks		Inclusion mode activated

