

ShiftCam

Product Packaging - Bi-color Panel User Manual Artwork

148mm x 191mm

对折

封底

封面

内页

3 | ShiftCam Bi-color Panel User Manual

Product Specification

Beads	White 80 PCS, Yellow 80PCS
CRI	95+
Input	8W/5V/1.6A
Output	8W/3.7V/2.16A
Battery capacity	3100mAh/11.47Wh
Illuminance	Distance: 0.3m/0.5m/1m Brightness: 1150LUX/550LUX/180LUX
Color temperature	2500-6500K
Work time	Strongest brightness >2h Weakest brightness >15h
Power	8W
Charge Port	Type-C
Beam angle	120°

*Product specification data is presented based on an average value, slight differences may exist amongst each individual product

Warranty

We offer a 2-Year Warranty that covers your ProLEDs products from any manufacturing flaws or defects. Warranty does not cover damages from accidents or misuse. Scan the QR code to register your ShiftCam product for warranty:



SHIFTCAM

EMPOWERING MOBILE CREATIVITY



ProLEDs
Bi-color Panel

1 | ShiftCam Bi-color Panel User Manual


Instructions

- Use only a microfiber and dry cloth for cleaning the product.
- Operate carefully to not cause any damage by dropping or physically shocking it.
- Do not leave the product in excessive heat, high temperatures can cause the product to malfunction
- Please note that this warranty does not apply to repair arising out of the malfunction of unauthorized disassembly
- Use of original cable accessories is recommended. Please note that this warranty does not apply to repairs arising out of the malfunction of non-original accessories
- The product is certificated by RoHS and CE. Please operate the product in full compliance with the user manual.
- The instructions and information in this manual are based on thorough, controlled company testing procedures.

Intended Use

- The user has read the instructions of this manual.
- The user is using the products within the operating conditions and limitations described in this product manual.
- "Improper use" means using the products other than as described in these instructions or under operating conditions which differ from those described herein


Product Overview

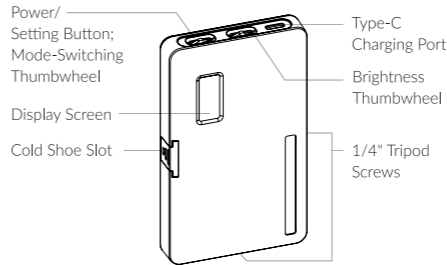

Power/Setting Button; Mode-Switching Thumbwheel | Type-C Charging Port | Brightness Thumbwheel | 1/4" Tripod Screws | Display Screen | Cold Shoe Slot


ShiftCam Bi-color Panel User Manual | 2

1. Power Button/Switching Modes




Long press to turn on the light

2. Display Zone




CCT Mode | CCT | 2570 K | 50 % | Power | Color Temperature | Brightness

Toggle the temperature adjust thumbwheel to adjust the color temperature (range: 2500-6500k) | Toggle the brightness adjust thumbwheel to adjust the brightness (range: 0-100%)



What's in the Box

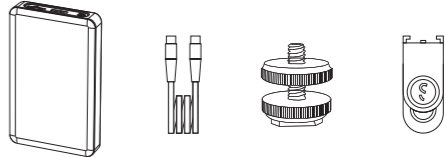

ProLEDs Bi-Color Panel | Type-C Cord | Cold Shoe Mount Adapter | Universal Mount