




Warranty/ Garantie
Garantía / Garantie / Garanzia



✉ cs@shiftcam.com

Scan to register your 1-Year-Warranty.
Scanner pour enregistrer votre warranty de 1 ans.
Escanee para registrar su jerga de 1 años.
Scannen Sie, um Ihre 1-jährige Schwierigkeit zu registrieren.
Scansion per registrare la tua garanzia di 1 anni




Quick Start Guide
Guide de démarrage rapide

Guia rápida de início
Schnellstartanleitung
Guida Rapida


Product Appearance

1. Universal Lens Mount
2. 12mm Lens Thread (Secondary)
3. 12mm Lens Thread (Main)
4. Cold Shoe Mount
5. Silicone Protective Padding
6. Tightening Screw



Using the Universal Mount

- 1 Align the Universal Lens Mount to the lens of your device.
- 2 Rotate the screw Clockwise to tighten until properly secure.
- 3 Place the Lens above the (Main) lens and Rotate Clockwise until secure.

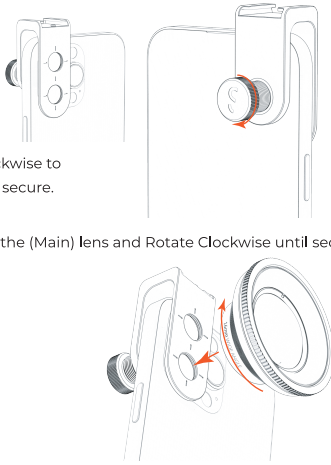

Technical Specifications

• Material:	Aerospace-Grade Aluminum (6063)
• Finishing:	Double Oxidation Treatment
• Mount:	F12XP0.75
• Weight:	26.17g
• Minium Depth:	28.9mm
• Maxmium Depth:	41.9mm
• Size:	57.9* 23.4* 28.9

Warnings

- Do not over-tighten the lens mount onto your phone, as it can damage both the phone screen and lens.
- Avoid using the lens mount with a phone that has a protective screen film, as it can interfere with image quality.
- Ensure the lens mount is securely attached to your phone before using to prevent the lens from falling off during use.
- Avoid using the lens mount in dusty or sandy environments, as particles can damage the lens.