

# ShiftCam

Product Packaging - RGBWW Panel User Manual Artwork

148mm x 191mm

对折


封底

封面

內頁

3 | ShiftCam Bi-color Panel User Manual

### What's in the Box

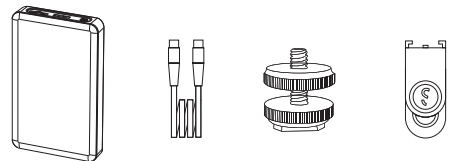

ProLEDs RGBWW Panel    Type-C Cord    Cold Shoe Mount Adapter    Universal Mount


### Product Specification

<b>Beads</b>	White 49 PCS, Yellow 49PCS, RGB 42 PCS
<b>CRI</b>	95+
<b>Input</b>	8W/5V/1.6A
<b>Output</b>	8W/3.7V/2.16A
<b>Battery capacity</b>	3100mAh/11.47Wh
<b>Illuminance</b>	Distance: 0.3m/0.5m/1m Brightness: 1150LUX/550LUX/180LUX
<b>Charging time</b>	3.5h
<b>Color temperature</b>	2500-9000K
<b>Work time</b>	Strongest brightness >2h Weakest brightness >15h
<b>Power</b>	8W
<b>Charge Port</b>	Type-C
<b>Beam angle</b>	120°

\*Product specification data is presented based on an average value, slight differences may exist amongst each individual product

### Warranty

We offer a 2-Year Warranty that covers your ProLEDs products from any manufacturing flaws or defects. Warranty does not cover damages from accidents or misuse. Scan the QR code to register your ShiftCam product for warranty:



# SHIFTCAM

EMPOWERING MOBILE CREATIVITY



## ProLEDs RGBWW Panel

1 | ShiftCam Bi-color Panel User Manual


### Instructions

- Use only a microfiber and dry cloth for cleaning the product.
- Operate carefully to not cause any damage by dropping or physically shocking it.
- Do not leave the product in excessive heat, high temperatures can cause the product to malfunction
- Please note that this warranty does not apply to repair arising out of the malfunction of unauthorized disassembly
- Use of original cable accessories is recommended. Please note that this warranty does not apply to repairs arising out of the malfunction of non-original accessories
- The product is certificated by RoHS and CE. Please operate the product in full compliance with the user manual.
- The instructions and information in this manual are based on thorough, controlled company testing procedures.


### Intended Use

- The user has read the instructions of this manual.
- The user is using the products within the operating conditions and limitations described in this product manual.
- "Improper use" means using the products other than as described in these instructions or under operating conditions which differ from those described herein

### Product Overview

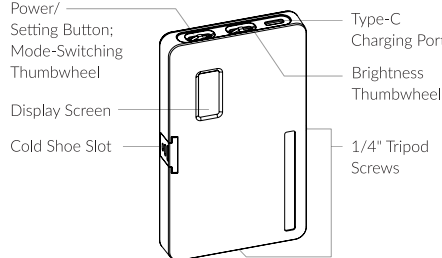


### 1. Power Button/Switching Modes



- Long press to turn on the light
- Short press to switch light mode (CCT Mode, RGB Mode, Effect Mode)

### 2. Display Zone


#### CCT Mode



Power    Color Temperature    Brightness

Toggle the first thumbwheel to adjust the color temperature (range: 2500-9000k)    Toggle the brightness adjust thumbwheel to adjust the brightness (range: 0-100%)


#### RGB Mode



RGB Color Hue    Brightness

Toggle the first thumbwheel to adjust the RGB color hue (range: 0-360°)    Toggle the brightness adjust thumbwheel to adjust the brightness (range: 0-100%)

#### Effect Mode



Current Effect    Brightness

Toggle the first thumbwheel to shift effects (20 kinds effects)    Toggle the brightness adjust thumbwheel to adjust the brightness (range: 0-100%)

### 3. Effects Mode

1 Cop Car	9 Fault Bulb	17 Green Flash
2 Ambulance	10 Pulsing	18 Blue Flash
3 Fire Alarm	11 Strobe	19 HSI Slow
4 Lightning	12 RGB Strobe	20 HSI Fast
5 Fireworks	13 Paparazzi	
6 TV	14 Emergency	
7 Candle	15 H/L Beam	
8 Party	16 Red Flash	